


SETUP: Where to put Jumpers when wiring WatchMonPlus

1. Based on your battery setup and WatchMonPlus add jumpers to pluggable connectors as per below table (table located on back of WatchMonPlus)

WatchMonPlus WM7

	JP1	JP2	JP3	JP4
10C	●			
9C	●	●		
8C	●	●	●	
7C	●	●	●	●
6C	●	●	●	●
	JC1	JC2	JC3	JC4


Note that the back of the device shows the pins that each jumper relates to.

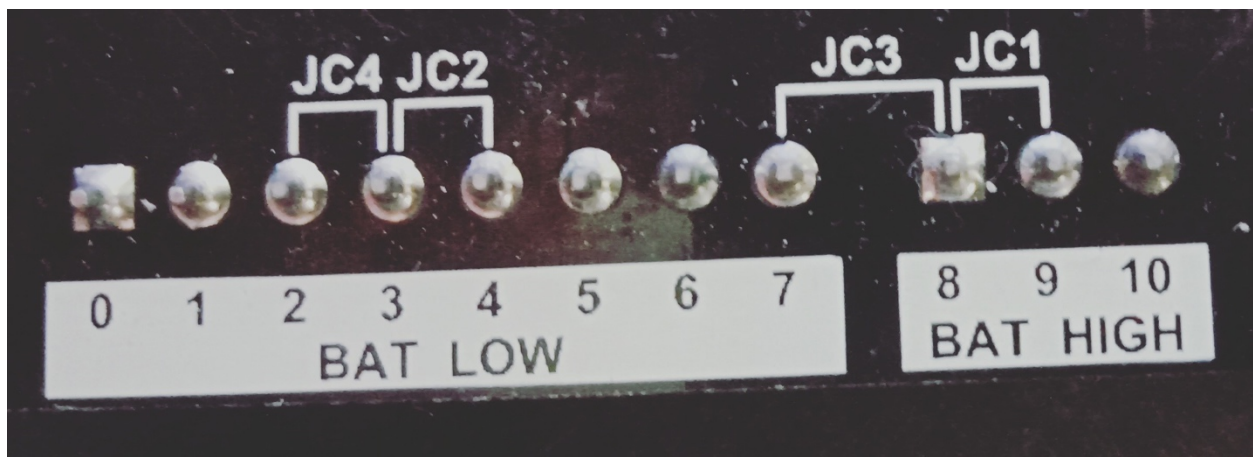

WatchMonPlus WM5 / MultiMon MM8

	JP1	JP2	JP3	JP4	JP5
14C	●				
13C	●	●			
12C	●	●	●		
11C	●	●	●	●	
10C	●	●	●	●	●
	JC1	JC2	JC3	JC4	JC5

Note that the back of the device shows the pins that each jumper relates to.

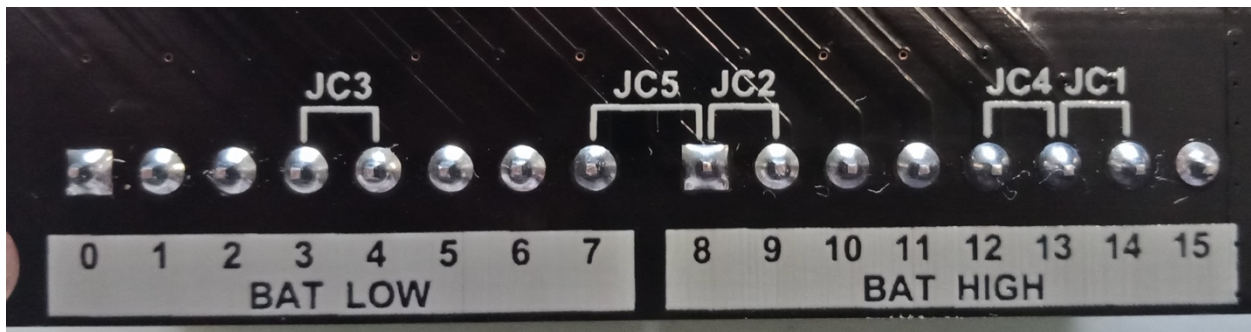

2. Once Pass achieved on TestMon move the pluggable connectors to your WatchMonPlus (most negative LOW first)